

### Analog Peripherals

#### 10-Bit ADC

- $\pm 1$  LSB INL; no missing codes
- Programmable throughput up to 200 ksp/s
- Up to 17 external inputs; programmable as single-ended or differential
- Built-in temperature sensor ( $\pm 3$  °C)

#### Two Comparators

Internal Voltage Reference: 2.4 V

#### POR/Brown-out Detector

#### USB Function Controller

- USB specification 2.0 compliant
- Full-speed (12 Mbps) or low-speed (1.5 Mbps) operation
- Integrated clock recovery; no external crystal required for either full-speed or low-speed operation
- Supports eight flexible endpoints
- Dedicated 1 kB USB buffer memory
- Integrated transceiver; no external resistors required

#### On-Chip Debug

- On-chip debug circuitry facilitates full speed, non-intrusive in-system debug (no emulator required)
- Provides breakpoints, single stepping
- Inspect/modify memory, registers, and USB memory
- Superior performance to emulation systems using ICE-chips, target pods, and sockets

Voltage Regulator Input: 4.0 to 5.25 V

Temperature Range: -40 to +85 °C

### High-Speed 8051 $\mu$ C Core

- Pipelined instruction architecture; executes 70% of instructions in 1 or 2 system clocks
- Up to 25 MIPS throughput with 25 MHz Clock
- Expanded interrupt handler

### Memory

- 1280 bytes data RAM
- 16 kB Flash; in-system programmable in 512-byte sectors (512 bytes are reserved)

### Digital Peripherals

- 25 port I/O; all are 5 V tolerant
- Hardware SMBus™ (I2C™ compatible), SPI™, and UART serial ports available concurrently
- Programmable 16-bit counter/timer array with five capture/compare modules
- 4 general-purpose 16-bit counter/timers

### Clock Sources

- Internal oscillator: 0.25% accuracy with clock recovery enabled; supports all USB and UART modes
- External oscillator: Crystal, RC, C, or Clock
- On-chip clock multiplier for USB controller

### Voltage Regulator


- On-chip voltage regulator supports USB bus-powered operation
- Regulator bypass mode supports USB self-powered operation

### Package

- 32-pin LQFP (standard lead and lead-free packages)

### Ordering Part Numbers

- Lead-free package: C8051F320-GQ
- Standard package: C8051F320

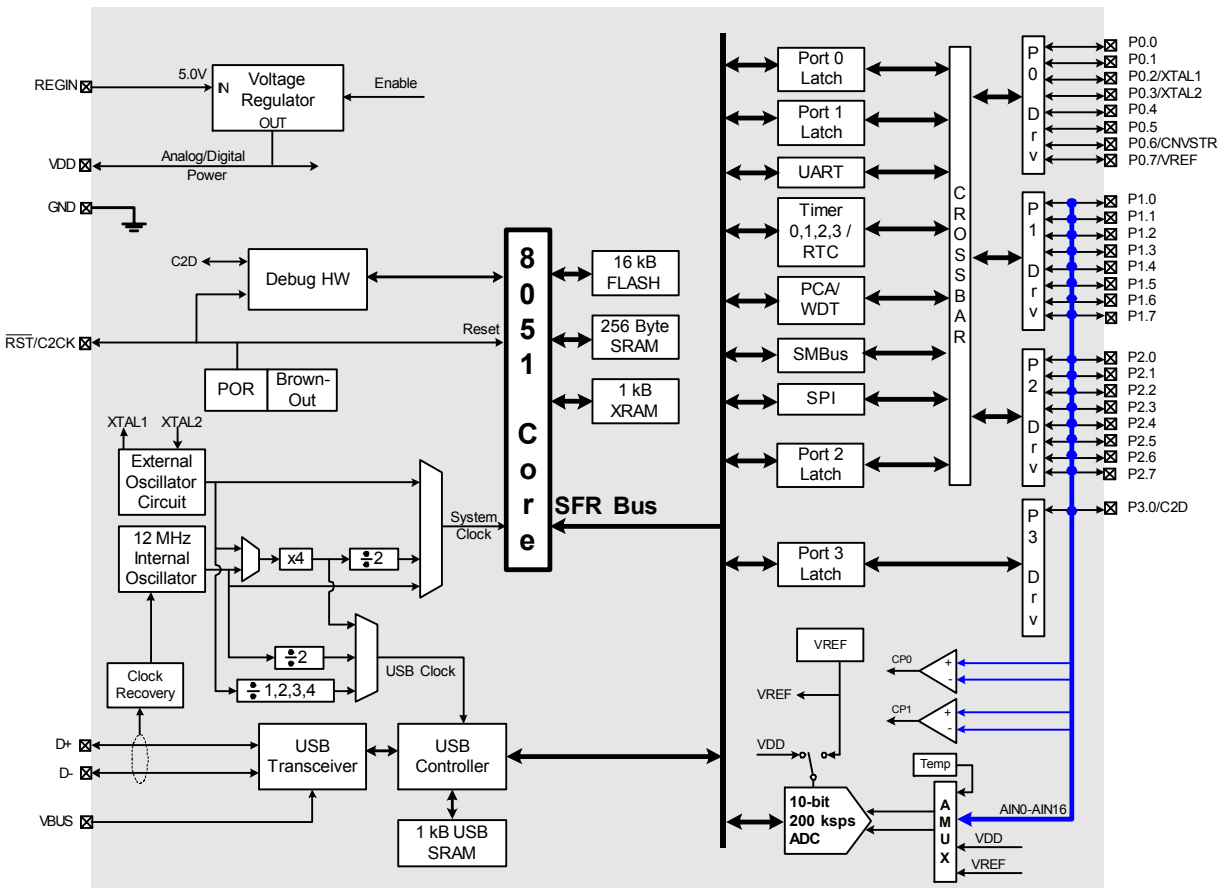


### Selected Electrical Specifications

( $T_A = 0$  to  $+70$  C°, VREG = 5.0 V unless otherwise specified)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>GLOBAL CHARACTERISTICS</b>					
Regulator Input Voltage (REGIN)		4.0		5.25	V
VDD (VREG Output)		3.0	3.3	3.6	V
VREG Bias Current	VREG Enabled		70		$\mu$ A
Supply Current with CPU and USB active	CPU Clock = 24 MHz, USB Clock = 48 MHz		18		mA
	CPU Clock = 12 MHz, USB Clock = 6 MHz		9		mA
Supply Current (suspend mode, Oscillator off)	V <sub>DD</sub> Monitor Enabled; VREG Disabled		30		$\mu$ A
	V <sub>DD</sub> Monitor Disabled; VREG Disabled		<0.1		$\mu$ A
CPU System Clock Range		DC		25	MHz
<b>INTERNAL OSCILLATOR &amp; CLOCKS</b>					
Frequency	Clock Recovery Enabled	11.97	12.0	12.03	MHz
	Clock Recovery Disabled	11.82	12.0	12.18	MHz
USB Clock	Full-Speed Operation	47.88	48.0	48.12	MHz
	Low-Speed Operation	5.91	6.0	6.09	MHz
<b>A/D CONVERTER</b>					
Resolution			10		bits
Integral Nonlinearity			$\pm 1/2$	$\pm 1$	LSB
Differential Nonlinearity	Guaranteed Monotonic		$\pm 1/2$	$\pm 1$	LSB
Signal-to-Noise Plus Distortion		53			dB
Throughput Rate				200	ksps
Input Voltage Range		0		V <sub>REF</sub>	V
<b>COMPARATOR</b>					
Response Time Mode0	(CP+) – (CP-) = 100 mV		0.1		$\mu$ s
Current Consumption Mode0			7.6		$\mu$ A
Response Time Mode1	(CP+) – (CP-) = 100 mV		0.18		$\mu$ s
Current Consumption Mode1			3.2		$\mu$ A
Response Time Mode2	(CP+) – (CP-) = 100 mV		0.32		$\mu$ s
Current Consumption Mode2			1.3		$\mu$ A
Response Time Mode3	(CP+) – (CP-) = 100 mV		1		$\mu$ s
Current Consumption Mode3			0.4		$\mu$ A

### Package Information

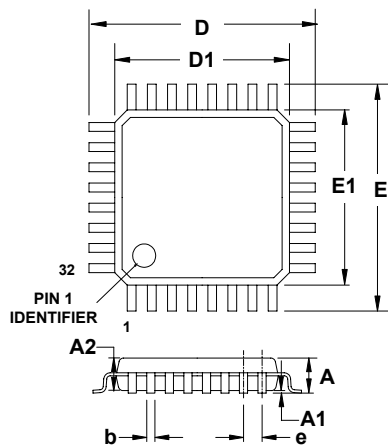

	MIN (mm)	NOM (mm)	MAX (mm)
A	-	-	1.60
A1	0.05	-	0.15
A2	1.35	1.40	1.45
b	0.30	0.37	0.45
D	-	9.00	-
D1	-	7.00	-
e	-	0.80	-
E	-	9.00	-
E1	-	7.00	-

### C8051F320DK Development Kit

